

Tier1

BloombergNEF



ISO14001

ISO9001

ISO45001




M10 TOPCON MONO

SPxxx-N108M10

- Black frame (xxx=410~440W)
- Silver frame
- Full black

30 Yr quality guarantee | 30 Yr power warranty

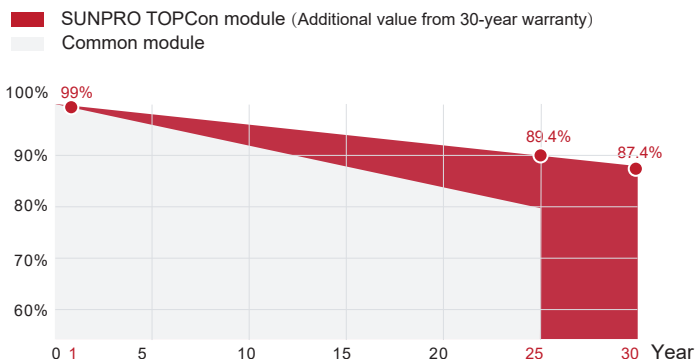

*SUNPRO Standard tiered warranty



WARRANTY & GUARANTEE

30 years for all rooftop installations

Linear output power guarantee
25 years: 89.4% power output
30 years: 87.4% power output



WITHSTAND STRONG

Snow load 5400Pa
Wind load 2400Pa



R&D AND PRODUCTION

Advanced production line. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



HIGH EFFICIENCY


N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 22.53%. Excellent low light performance. under the conditions of haze, overcast, etc.

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type

	410W	415W	420W	425W	430W	435W	440W
Max power(Pmax)	410	415	420	425	430	435	440
Max power voltage(Vmp)	31.25	31.37	31.49	31.64	31.79	31.94	32.09
Max power current(Imp)	13.12	13.23	13.34	13.44	13.53	13.62	13.72
Open circuit voltage(Voc)	37.94	38.04	38.13	38.24	38.34	38.43	38.53
Short circuit current(Isc)	13.85	13.96	14.07	14.16	14.25	14.34	14.43
Module Efficiency(%)	21.00	21.25	21.51	21.76	22.02	22.28	22.53
Max system voltage	DC 1500V (TUV) /1500V(UL)						
Maximum Series Fuse Rating	25A						

DIMENSIONS AND STRUCTURE

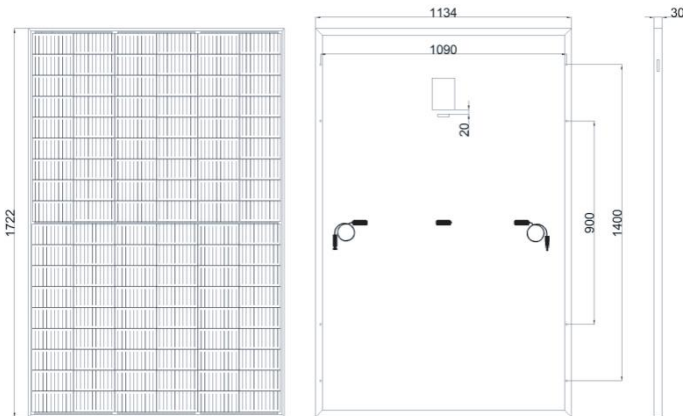

Length: + 2mm
 Width: + 2mm
 Thickness: + 1mm
 Hole pitch: + 2mm

Electrical parameters at NMOT test conditions

(Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	410W	415W	420W	425W	430W	435W	440W
Max power(Pmax)	308	312	316	320	324	325	329
Max power voltage(Vmp)	29.40	29.50	29.60	29.70	29.90	29.80	29.90
Max power current(Imp)	10.42	10.58	10.67	10.75	10.84	10.91	11.00
Open circuit voltage(Voc)	35.70	35.80	35.90	36.00	36.10	36.00	36.10
Short circuit current(Isc)	11.16	11.25	11.34	11.41	11.48	11.56	11.63

Mechanical Data


Dimensions	1722x1134x30mm
Weight	21.5kg
Glass	3.2mm Coated toughened
Output cables	4mm ² , symmetrical lengths 1100mm
Cell type	N type Mono-Crystalline , 16BB , 182x91mm
Number of cells	108cells (Half-Cell)
Connectors	Taizhou Chuangda Electronic Co.,Ltd. Type: PV-TT02,1500V DC, 43A, -40 to 85°C, IP68(1m,1h)

Temperature Characteristics

Packing Configuration

Temp.Coeff.of Isc(TK Isc)	0.046%/°C	Container	40'GP
Temp.Coeff.of Voc(TK Voc)	-0.25%/°C	Pieces per pallet	36
Temp.Coeff.of Pmax(TK Pmax)	-0.30%/°C	Pallets per container	26
Operating temperature	-40~+85°C	Pieces per container	936
Normal operating cell temperature	45±2°C		

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

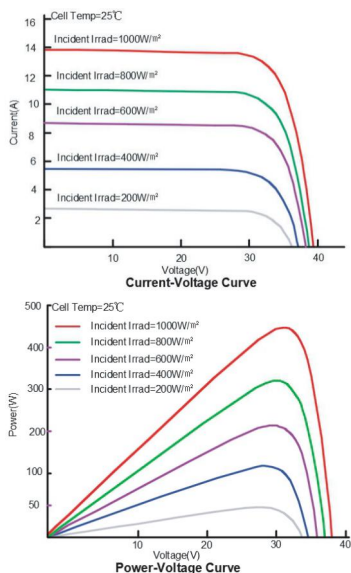

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, CE, WEEE, INMETRO, FIRE CERTIFICATE C1
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	±3%
Junction box	IP 68
Warranties	30 years product warranty and 30 years 87.4% of power
Fire class rating	Class C