

Tier1

BloombergNEF



ISO14001

ISO9001

ISO45001




M12 HIEFF TWIN MONO

SPxxx-132M12


- Silver frame (xxx=640~670W)
- Black frame
- Full black
- Bifacial

30 Yr quality guarantee | 30 Yr power warranty

■ SUNPRO TOPCon module (Additional value from 30-year warranty)
 □ Common module

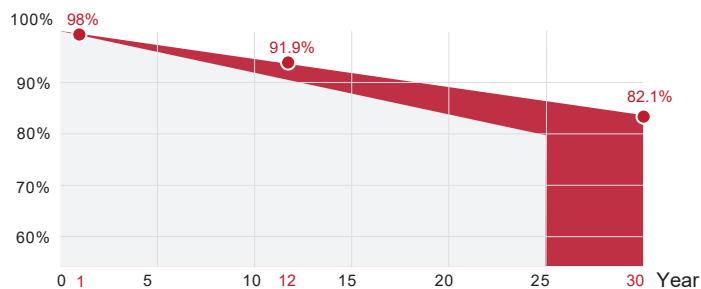

*SUNPRO Standard tiered warranty

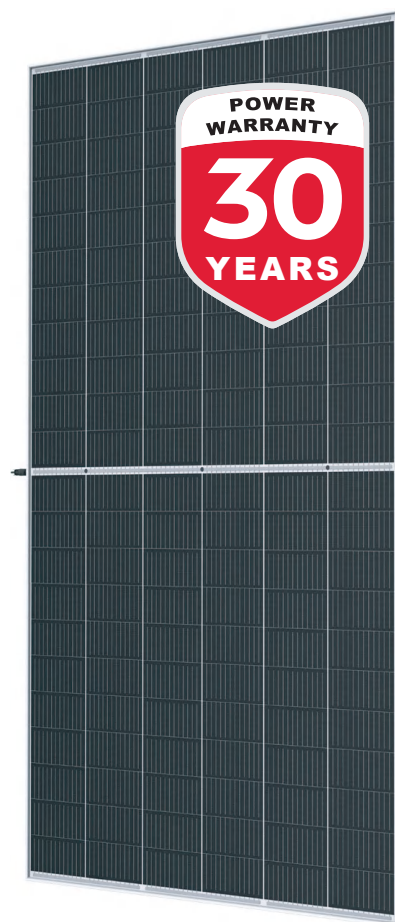

WARRANTY & GUARANTEE

30 years for all rooftop installations

Linear output power guarantee
 12 years: 91.9% power output
 30 years: 82.1% power output



WITHSTAND STRONG

Snow load 5400Pa
 Wind load 2400Pa



R&D AND PRODUCTION

Advanced production line.
 The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



HIGH EFFICIENCY

N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 21.57%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type

	640W	645W	650W	655W	660W	665W	670W
Max power(Pmax)	640	645	650	655	660	665	670
Max power voltage(Vmp)	36.97	37.18	37.38	37.58	37.79	38.01	38.22
Max power current(Imp)	17.31	17.35	17.39	17.43	17.47	17.5	17.53
Open circuit voltage(Voc)	44.85	45.06	45.27	45.48	45.69	45.91	46.13
Short circuit current(Isc)	18.36	18.4	18.44	18.48	18.52	18.56	18.60
Module Efficiency(%)	20.60	20.76	20.92	21.09	21.25	21.41	21.57
Max system voltage	DC 1500V(TÜV) /1500V(UL)						
Maximum Series Fuse Rating	35A						

DIMENSIONS AND STRUCTURE



Electrical parameters at NMOT test conditions



(Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	650W	655W	660W	665W	670W
Max power(Pmax)	484	490	494	499	509
Max power voltage(Vmp)	34.70	35.10	35.30	35.50	36.20
Max power current(Imp)	13.93	13.96	14.00	14.03	14.07
Open circuit voltage(Voc)	42.30	42.70	42.90	43.20	43.90
Short circuit current(Isc)	14.84	14.87	14.90	14.93	14.96

Mechanical Data

Dimensions	2384x1303x35mm
Weight	34 kg
Glass	3.2mm tempered glass
Output cables	4mm ² , symmetrical lengths 1300mm
Cell type	Mono-Crystalline PERC, 12BB, 210x105mm
Number of cells	132 cells (Half-Cell)
Connectors	Taizhou Chuangda Electronic Co.,Ltd. Type: PV-TT02,1500V DC, 43A, -40 to 85° C, IP68(1m,1h)

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

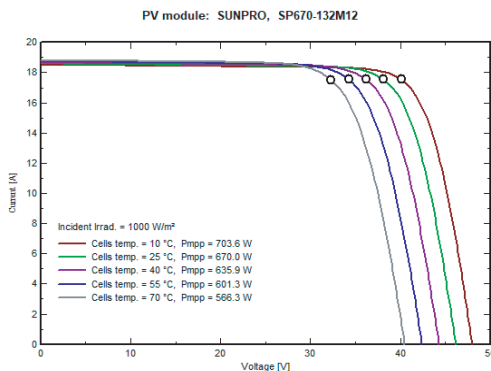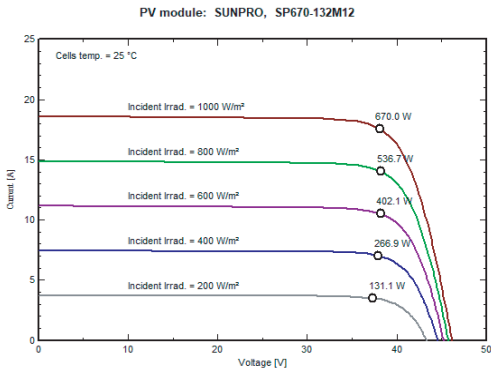

Temperature Characteristics

Temp.Coeff.of Isc(TK Isc)	0.049%/°C
Temp.Coeff.of Voc(TK Voc)	-0.27%/°C
Temp.Coeff.of Pmax(TK Pmax)	-0.35%/°C
Operating temperature	-40~+85°C
Normal operating cell temperature	44±2°C

Packing Configuration

Container	40'HQ
Pieces per pallet	31
Pallets per container	18
Pieces per container	558

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730, IEC 61701, IEC 62716, PPP 58042
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TUV, CE, WEEE, INMERTRO, FIRE CERTIFICATE C1
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	±3%
Junction box	IP 68
Warranties	30 years product warranty and 30 years 82.1% of power
Fire class rating	Class C